


## RoughDeck™ QC Quick Clean Stainless Steel Floor Scale

**Easy  
Lifting!**

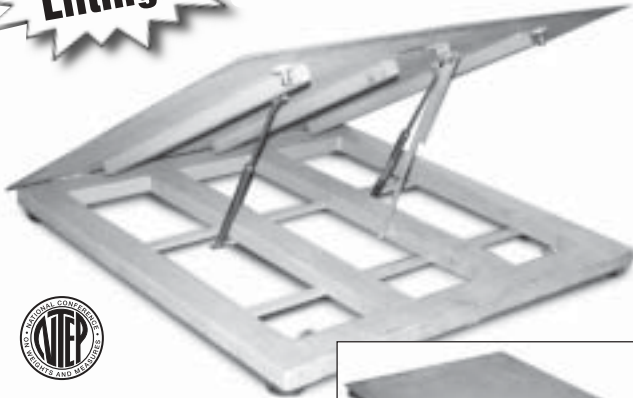

*Shown with optional treadplate*

**(SEE CHART ON BACK OF PAGE FOR PART #'S)**

As easy to lift as the hood on your car, the RoughDeck QC provides an efficient mechanism for busy cleanup personnel.

Ideal for food processing and other applications requiring frequent washdown, the RoughDeck QC provides easy underdeck cleaning by using two gas shock lifting cylinders to raise the top of the scale. Once the deck is raised, a manual safety bar can be positioned and the underdeck area can be thoroughly washed out.

The RoughDeck QC features a rugged washdown design, including 304 stainless steel construction and four stainless steel hermetically sealed shear beam load cells. Adjustable SUREFOOT™ support feet provide superior accuracy and repeatability by accommodating side impacts and decreasing extraneous forces on the load cell.

*Standard RoughDeck QC is not designed for fork truck traffic or point loading. Please consult factory for pricing on RoughDeck QC special if your application involves either.*

### Applications

- Food and chemical processing
- Low-profile pit or above-ground use

### Standard Features

- Rugged washdown design
- Smooth, 304 stainless steel top deck
- Four stainless steel welded seal shear beam load cells
- Rigid 304 stainless steel tube frame
- Remote EL604 stainless steel NEMA 4X junction box
- Four adjustable stainless steel SUREFOOT™ support feet
- 20 ft of SURVIVOR® EL147HE hostile environment load cell cable
- Manual drop-in-place safety bar

### Options/Accessories

**28740** ..... Floor stand for indicator, 36.3" high, stainless steel, suitable for IQ plus® 310A, IQ plus® 355, IQ plus® 390, IQ plus® 590, IQ plus® 800, IQ700, IQ plus® 510, IQ plus® 710, UMC444 and UMC555

**Consult factory for this additional option:**

- Treadplate stainless steel top deck

**Access ramps and pit frames available.**  
**See price pages FS-8 (P) and FS-9 (P)**

## APPROVALS:

NTEP certified per H-44, Class III 5000d;  
CC# 92-001A5

## END LOAD CAPACITY:

100% full scale

## mV/V OUTPUT:

1.50-1.87 mV/V nominal

## CABLE LENGTH:

20 ft (6.1m) (for connecting j-box to indicator)

## REMOTE J-BOX:

Stainless steel enclosure can be located up  
to 10 ft away from scale

## WARRANTY:

Five year limited warranty

## DIMENSIONS

### QC BASES

PART #	SIZE (W x L x H)	CAPACITY LB (KG)	SHIP WT LB
50402	2.5' x 2.5' x 3.5"	2000 lb (1000 kg)	158 lb
50403	3' x 3' x 3.5"	2000 lb (1000 kg)	208 lb
50404	4' x 4' x 3.5"	2000 lb (1000 kg)	338 lb
50405	4' x 4' x 3.5"	5000 lb (2500 kg)	338 lb
50406	4' x 4' x 4.5"	10,000 lb (5000 kg)	447 lb
50407	4' x 5' x 3.5"	2000 lb (1000 kg)	406 lb
50408	4' x 5' x 4.5"	5000 lb (2500 kg)	406 lb
50409	4' x 5' x 4.5"	10,000 lb (5000 kg)	540 lb
50410	4' x 6' x 4.5"	2000 lb (1000 kg)	477 lb
50411	4' x 6' x 4.5"	5000 lb (2500 kg)	477 lb
50412	4' x 6' x 5.5"	10,000 lb (5000 kg)	637 lb
50413	5' x 5' x 4.5"	2000 lb (1000 kg)	478 lb
50414	5' x 5' x 4.5"	5000 lb (2500 kg)	478 lb
50415	5' x 5' x 4.5"	10,000 lb (5000 kg)	637 lb
50416	5' x 7' x 5.5"	2000 lb (1000 kg)	705 lb
50417	5' x 7' x 4.5"	5000 lb (2500 kg)	705 lb
50418	5' x 7' x 4.5"	10,000 lb (5000 kg)	908 lb

*Standard RoughDeck QC is not designed for fork truck traffic or point loading. Please consult factory for pricing on RoughDeck QC special if your application involves either.*

Access ramps and pit frames available. See price pages FS-8 (P) and FS-9 (P)

